
64AN000

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ADAMS MAGNETIC PRODUCTS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ADAMS MAGNETIC PRODUCTS IS PROHIBITED



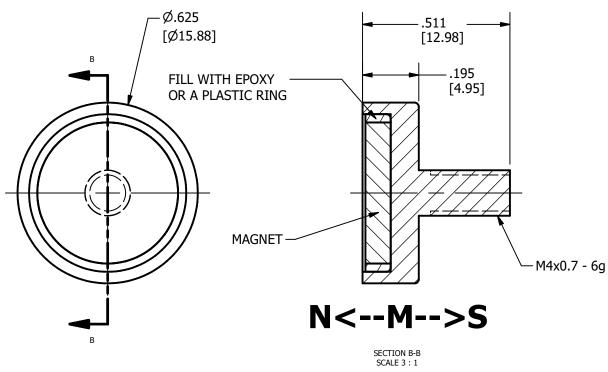

## NOTES:

- 1. REMOVE ALL BURRS AND SCRATCHES
- 2. MACHINED CUP SURFACE FINISH: NICKEL
- 3. MAGNET SURFACE FINISH: NICKEL-COPPER-NICKEL
- 4. PULL FORCE: 12 LBS. TYPICAL
- 5. MAGNET GLUED TO CUP, FILL WITH EPOXY OR PLASTIC RING
- 6. DIMENSIONS IN BRACKETS ARE MILLIMETERS
- 7. SUPPLY FULLY MAGNETIZED, NORTH POLE EXPOSED ON MAGNET
- 8. WORKING TEMPERATURE: -40°C TO +80°C

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES  TOLERANCES:  ANGULAR:  .X  .XX  .XXX  .XXXX	MAGNETIZATION			888 Larch Avenue Elmhurst, IL 60126 Ph: (630) 617-8880						
	APPROVAL	NAME	DATE	PART NEO RB W/ M4 STUD						
	DRAWN	B.Tucker	09/26/19	DESCRIPT	DESCRIPTION:					
	CHECKED			PART	64AN000				Rev	
	ISSUED			NUMBER:	O IANOOO				1	
MATERIAL: NdFeB / STEEL	FINISH: NICKEL				THIRD ANGLE PROJECTION	DO NOT SCALE	SIZE	Sheet 2	2 of 2	