


## Introducing CLINGMAG<sup>™</sup>

ClingMAG<sup>™</sup> combines two separate holding technologies, magnetic holding force and micro-suction holding force to produce a thinner and lighter magnet that addresses two potential challenges with magnet signage. The micro-suction silicon layer on the back helps to reduce magnet particle migration while it increases the holding force of the magnet, keeping it from sliding.

- Over 220 pounds per SF of holding force
- Up to 10 TIMES stronger pull strength than standard magnet sheet of the same thickness
- Matte white vinyl print surface compatible with UV curable and screen print ink sets
- The micro-suction silicon layer over the magnet adds holding force. It also protects painted surfaces from magnet particle migration and leaves no residue after long-term use.
- Designed for smooth steel surfaces such as elevators, steel doors, and vehicles.

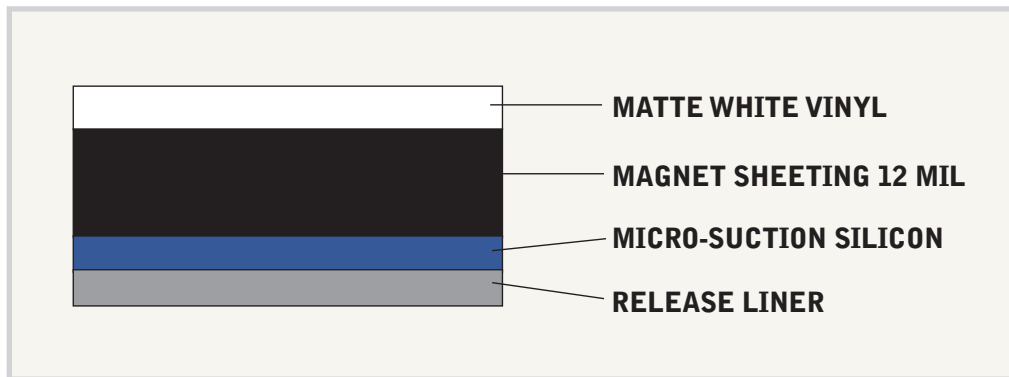

Item	Thickness	Width: Inches	Length: Feet	Topside Finish	Approx Roll Wt (lbs)
22V0001	.018	24	50	White Matte Vinyl	48

### Process & Storage

- Works best at temperatures between 50 and 95°F and relative humidity between 20 and 70%.
- Shelf Life: 12 Months
- Make sure there is no dirt on the back of the material or the application surface to avoid bubbles, bumps and other defects.
- Avoid excessive UV ink piling. Soft UV ink is recommended.

### INSTRUCTIONS

1. Print
2. Cut
3. Remove Release Liner
4. Apply to a clean steel surface.

